

Setting up Delegated Authentication With the Installer

Delegated Authentication

At present, we support delegating the authentication of users to the following provider interfaces:

- LDAP
- SAML
- OIDC
- CAS

When enabling Delegated Auth, you can still allow local users managed by Element to connect to the instance

Delegated Auth


Provider to delegate authentication to

Allow Local Users Login

Enabled

Edited ▼

When `Allow Local Users Login` is `Enabled`, you can both connect to your instance using your IDP and the local database.

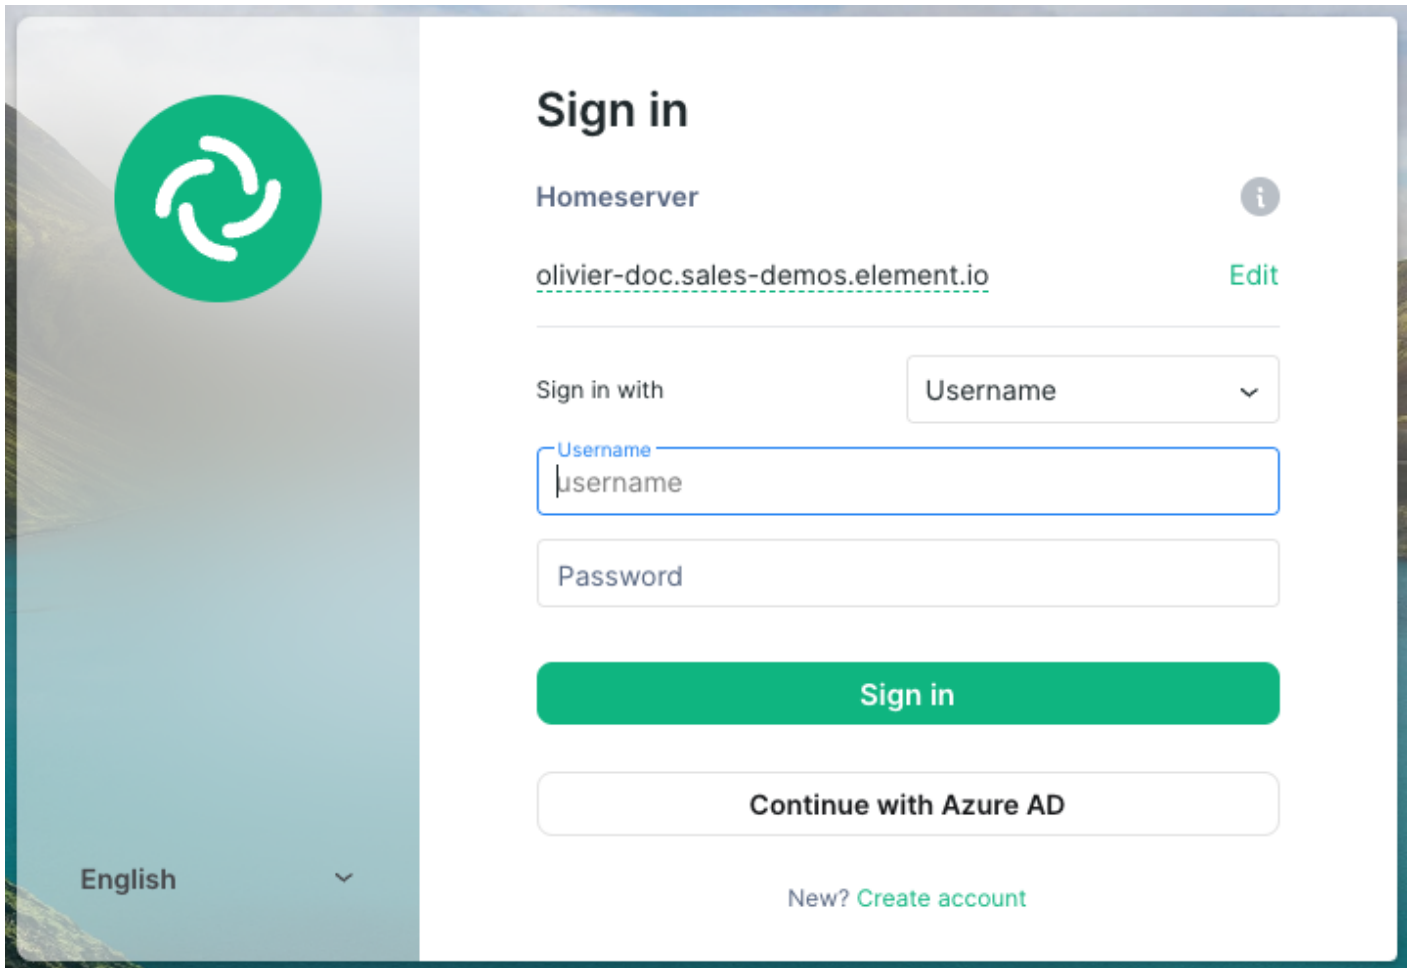

Sign in

Homeserver ⓘ

[olivier-doc.sales-demos.element.io](#) [Edit](#)

Sign in with Username ▾

Username
username

Password

Sign in

Continue with Azure AD

English ▾

New? [Create account](#)

Different options are offered by the installer and you can combine two or more options on the same instance like enabling SAML and OIDC delegated authentication.

[Setting up Delegated Authentication with LDAP on Windows AD](#)

[Setting up Delegated Authentication with OpenID on Microsoft Azure](#)

[Setting up Delegated Authentication with OpenID on Microsoft AD FS](#)

[Setting up Delegated Authentication with SAML on Microsoft Azure](#)

Note: We are rapidly working to expand and improve this documentation. For now, we are providing screenshots of working configurations, but in the future, we will better explain the options as well. If you do not see your provider listed below, please file a support ticket or reach out to your Element representative and we will work to get you connected and our documentation updated.

Troubleshooting

Redirection loop on SSO

Synapse needs to have the `X-Forwarded-For` and `X-Forwarded-Proto` headers set by the reverse proxy doing the TLS termination. If you are using a Kubernetes installation with your own reverse proxy terminating TLS, please make sure that the appropriate headers are set.

Revision #29

Created 18 April 2022 14:32:08 by Karl Abbott

Updated 13 May 2025 14:30:30 by Kieran Mitchell Lane